

MCRT[®] 84000V & MCRT[®] 85000V

Bearingless Digital Torquemeters

Torque Ranges: 250 to 100,000 lbf-in (28.2 N-m to 11,300 N-m)

BEST* ACCURACY UNDER REAL - WORLD CONDITIONS

WIDEST INSTALLED MEASUREMENT BANDWIDTH AND FASTEST INSTALLED RESPONSE

SIMPLE TO INSTALL, TOLERANT OF WIDE ROTOR-STATOR MISALIGNMENT

LOWEST SENSITIVITY TO CLAMPING LOADS

HIGHEST OVERRANGE AND OVERLOAD

WORLD CLASS TEMPERATURE PERFORMANCE

GREATEST IMMUNITY TO EXTERNAL NOISE

BI-DIRECTIONAL ROTOR SHUNT CALIBRATION

NO HOOP OR CALIPER ANTENNAE

- 0.019% Combined Nonlinearity & Hysteresis
- 200% & 400% Overload
- 300% Overrange
- 0.0003%/°F Compensation
- 3 kHz Signal Bandwidth
- Analog and FM Outputs
- Digital Output of Torque & Temperature
- 12 Units of Measure
- 13 Bessel Data Filters
- Max/Min's Updated @ 20 kHz
- Interface Software Furnished



*NIST traceable calibration performed in our accredited laboratory (NVLAP Lab Code 200487-0). For details visit www.himmelstein.com or follow the accreditation link at www.nist.gov.

MCRT[®]84000V and 85000V Torquemeters have **very high accuracy in real-world applications, not just in the cal lab**. That's due to their **extremely high stiffness which yields wider installed bandwidth and faster response than any competitive device¹**. Furthermore, **Industries highest Overrange avoids measurement errors² which occur when torque peaks are clipped**.

World class temperature performance greatly reduces drive heating and gradient errors. Also enhancing real world performance is noise hardening against electromagnetic interference (EMI) generated by Variable Frequency Drives, ISM transmitters and other industrial noise sources.

Bi-directional rotor shunt cal verifies calibration and operation of the entire data chain in **CW and CCW modes**.

1. See Application Note 221101D 2. See Application Note 20805B

It is invoked via stator switches, I/O line or from your computer. Multiple bridges and elegant design provide **exceptional immunity to clamping and other extraneous loads**. These devices have very high stiffness, low deflection and provide **unsurpassed static and dynamic system response**. The Torquemeter is installed without an additional coupling resulting in a torsionally stiff driveline, with low overhung moment and a short overall length.

The torque signal is digitized on the rotor and sent to the stator where analog, frequency and Com Port outputs are created. Choose RS232/RS422/RS485 or USB communications. Included software interfaces with your Windows-based PC. It displays Real-time, Max/Min and Spread Torque, Rotor Temperature, does limit checks, torque versus time plots and stores test results. Password protection may be invoked.

S. HIMMELSTEIN AND COMPANY

Designing and Making the World's Best Torque Instruments Since 1960

Exceptional Immunity To Noise And Interference From ISM Transmitters

All bearingless Torquemeters necessarily use unshielded antennae. As a result, any device (including a like Torquemeter) operating at or near their carrier frequency, can cause interference. FCC rules allow Industrial, Scientific and Medical (ISM) devices to generate unlimited energy. Such ISM devices are commonly used for inventory control, parts tracking, controlling personnel access, induction heating, etc. Most Bearingless Torquemeters use an ISM frequency for data transfer. As a result, they are

susceptible to interference from other ISM devices. Since FCC rules only allow narrow band (typically ± 7 kHz) transmission for unlicensed use, wideband ISM frequency Torquemeters risk violation of FCC regulations. Himmelstein Bearingless Torquemeters use non-ISM frequencies for power and data, have field strengths within FCC rules, powerful 12 pole signal filters and near field (not radiated field) signal transfer.

Common Specifications*	Code N Performance	Code C Performance
Torque Range¹	Factory Set @ Transducer Full Scale Torque; see Note 1.	
Torque Units of Measure	Select lbf-in, lbf-ft, ozf-in, ozf-ft, N-m, kN-m, N-cm, kgf-m, kgf-cm, gf-cm without re-calibration	
Temperature Units of Measure	Select °F or °C without re-calibration	
Combined Nonlinearity & Hysteresis (Best Fit Line Basis - see Tech Memo 230104)	$\leq \pm 0.03\%$ of Range (20 to 100% of full scale) $\leq \pm 0.01\%$ of Range (0 to 20% of full scale)	$\leq \pm 0.019\%$ of Range (20 to 100% of full scale) $\leq \pm 0.006\%$ of Range (0 to 20% of full scale)
Overrange² (% of Range)	150 or 300, model/user selection dependent. Applies to all outputs except limited to 200% on CCW FM output.	
Repeatability	$\leq \pm 0.015\%$ of Range	$\leq \pm 0.01\%$ of Range
Accuracy³ (nonlinearity, hysteresis & repeatability)	$\leq \pm 0.04\%$	$\leq \pm 0.025\%$
Calibration Signal⁴	100.00% of full scale for clockwise and counterclockwise directions.	
Bi-polar Shunt Calibration Enable	From Stator Switches (one CW, one CCW), via TTL I/O, or PC Com Port using furnished software.	
Zero Drift (% of Range per °F/per °C)	$\leq \pm 0.001/0.0018$	$\leq \pm 0.0003/0.00054$
Span Drift (% of Reading per °F/per °C)	$\leq \pm 0.002/0.0036$	$\leq \pm 0.002/0.0036$
48 Hour Drift (% of Range - applies to all outputs)	$\leq \pm 0.02$	$\leq \pm 0.01$
Temperature Ranges (°F/°C)	Compensated Range: +75 to +175/+24 to +79.4; Usable Range: -25 to +185/-32 to +85 Storage Range: -65 to +225/-54 to +107	
Rotor to Stator Maximum Misalignment (inches/mm)	Axial: $\pm 0.4/10.2$, Radial: 0.3/7.6 with or without Optical (Code O) Speed Pickup Option. If Magnetic (Code Z) Speed Pickup Option is installed, then both maximums become 0.04/1.0.	
Effect of Clamping Loads (% of Range)	$\leq \pm 0.06$	$\leq \pm 0.03$
Analog Output Signals⁵, Auto-Scaled	Allowable Load: 10k resistive, minimum; 0.05 μ F capacitive, maximum.	
MCRT[®] 84000V Full Scale Torque³	Default is $\pm 10V$ with $\pm 15V$ overrange. User may select $\pm 5V$ with $\pm 7.5V$ overrange. Caution: see Note 2.	
MCRT[®] 85000V Full Scale Torque³	Default is $\pm 5V$ with $\pm 15V$ overrange. User may select $\pm 10V$ with $\pm 15V$ overrange. Caution: see Note 2.	
Signal Filter Cutoff Frequency⁶	Field selectable from 0.1 Hz to 1 kHz in thirteen 1-2-5 steps plus 3 kHz. Selected from a remote PC using furnished software.	
Frequency Modulated Output⁵	Frequency: 10 ± 5 kHz or 20 ± 10 kHz or 40 ± 20 kHz; field changeable (Default = 10 ± 5 kHz); TTL square wave output.	
Peak-Peak Digital Output⁵ Noise vs Filter Cutoff Frequency (% of Range)	<0.001 @ 0.1Hz, 0.002 @ 1 Hz, 0.004 @ 10 Hz, 0.01 @ 100 Hz, 0.0372 @ 1 kHz and 0.06 @ 3 kHz.	
Peak-Peak Analog Output^{5,7} Noise vs Filter Cutoff Frequency (millivolt)	On 10V Setting: 6 @ 0.1 to 100 Hz, 8 @ 1 kHz and 12 @ 3 kHz On 5V Setting: 6 @ 0.1 to 100 Hz, 7 @ 1 kHz and 8 @ 3 kHz.	
Torque Sampling Rate and Bandwidth	Sampled @ 20 kHz. Torque 3 dB bandwidth is 3 kHz reducible by filters (see Note 6 & above).	
System Resolution² (% of Range)	0.01	
Rotor-to-Stator Transfer Rate	1.25 Mbaud	
RS232/RS422/RS485/USB Communication⁸	Com port outputs Torque and Temperature with units of measure. Inputs torque range if other than sensor full scale, selects units of measure, selects filter cutoff, etc. and permits remote computer control of the test.	
BAUD Rate	115,200; Drivers are protected for short circuit (current limit) and ± 15 kV ESD protected.	
Maximum Cable Length	RS232 = 50 feet, RS422/485 = 4,000 feet; 120 Ohm termination may be accessed via software.	
Interface Software With Torque Limits	Provided to interface with Windows-based PC. Includes 20 foot interconnect cable for a PC.	
I/O Lines and FM Output⁵	Input lines are +CAL, -CAL, TARE, CLEAR TARE, and RESET MAX/MIN. Output lines are Data OK and FM Output.	
Status LED's (on Stator Keypad)	Three Color Coded LED's: Power (Yellow = Power-up, Green = OK, Red = Fault); Data (Green = OK, Red = Data Error); Rotor Temperature (Green = In Operating Range, Red = Out of Operating Range).	
Keypad Control Switches	+ CAL invokes CW Rotor Shunt Cal, -CAL invokes CCW Rotor Shunt Cal, Both held simultaneously for 5 seconds invokes TARE.	
Rotor Temperature	Rotor temperature is output via Com Port. Range is 0 to 185 °F.; Accuracy is ± 2 °F.	
Optional Zero Velocity Speed Pickups	Optical and Magnetic pickups output pulse train. Magnetic type restricts misalignment; see above	
Supply Voltage/Power⁹	10 to 26 VDC @ 6 to 11 Watts nominal, varies with rotor misalignment.	

Specification Notes:

- Outputs may be set at any value \leq Torquemeter Full Scale Rating. *For example:* If the Full Scale Rating is 10,000 lbf-in, the user may re-scale to 5,000 lbf-in. Then the analog output would be 5 or 10 Volts at 5,000 lbf-in and the digital output, at the Com Port, would be 5,000. However, the above specification still defines measurement accuracy. In other words, you can use this capability to change the scaling but it will not change measurement accuracy; see Application Note 20804 for further details on Torquemeters operated with extended measuring range.
 - In the overrange region** all outputs are guaranteed to have combined nonlinearity and hysteresis lower than 0.1% of full scale. This avoids large average and peak torque errors that driveline resonance and pulsating driver and load devices can cause near the high end of the sensor range. See Application Note 20805B for more complete information. Torquemeters have infinite fatigue life for full reversals up to half their overload rating. Above that, you risk a fatigue failure.
An MCRT® 85000V will provide accurate data, without yielding, when torque peaks are 300% of its full scale rating. However, its fatigue life will be reduced and therefore, **it should not be used continuously or for long periods above half its overload rating.** Additionally, if you are using the analog output, it is linear up to 15 volts. That corresponds to 150% of full scale on the 10 volt output setting and 300% on the 5 volt output setting. Accordingly, if you expect torque peaks greater than 150% of full scale, you should switch to the 5 volt setting.
 - Assumes torque range is set to the device full scale torque rating.
 - CW torque causes CW rotation if viewed from the driving end. CCW torque causes the opposite rotation.
 - Power input and all outputs are protected. Digital inputs are reverse polarity and over-voltage protected.
 - Torque signal bandwidth upper limit is 3 kHz determined by the integral anti-aliasing filter. Realizable, installed measurement bandwidth is limited by driveline components. A torquemeters principle contribution is determined by its torsional stiffness; see Application Note 221101D for further information.
 - Analog noise is measured by an Agilent U1520A Scope with bandwidth set to 10 kHz.
 - A 20 foot long Torquemeter to RS422/485 PC port cable is shipped with each Torquemeter. That communication protocol provides for long, robust connection in a noisy industrial environment, and permits connection of multiple Torquemeters to a single, host computer. Since many PC's are only equipped with USB ports, a USB to RS232/485 adapter is also furnished.
 - Fused and reverse polarity protected.
- * Specifications are subject to change without notice.

MCRT® 84000V Bearingless Torquemeters With 200% Overload

MCRT® Model	Torque Rating		Speed Rating	Torsional Stiffness	Maximum Angular Deflection	Rotating Inertia	Maximum Extraneous Loads ¹			Max Rotor Wt.
	Range	Overload					Thrust	Bending	Shear	
English Units	[lbf-in]		[rpm]	[lbf-in/rad]	[degree]	[ozf-in s ²]	[lbf]	[lbf-in]	[lbf]	[lbs]
84002V(5-2)	500	1,000	0 to ±15,000 Suffix H or, 0 to ±8,500 Suffix B	5.27 X 10 ⁵	0.054	0.634	500	250	125	5.0
84002V(1-3)	1,000	2,000		1.48 X 10 ⁶	0.039	0.635	1,000	500	250	5.0
84002V(2-3)	2,000	4,000		4.02 X 10 ⁶	0.028	0.638	2,000	1,000	500	5.0
84004V(5-3)	5,000	10,000	0 to ±13,500 Suffix H or, 0 to ±8,000 Suffix B	4.56 X 10 ⁶	0.063	3.96	3,000	1,500	800	13.3
84004V(1-4)	10,000	20,000		1.26 X 10 ⁷	0.045	3.97	4,000	2,000	1,000	13.4
84004V(2-4)	20,000	40,000		3.39 X 10 ⁷	0.034	3.99	6,000	3,000	2,000	13.5
84007V(5-4)	50,000	100,000	0 to ±10,000 Suffix H or, 0 to ±6,000 Suffix B	5.59 X 10 ⁷	0.051	29.3	15,000	7,500	4,000	43.3
84007V(1-5)	100,000	200,000		1.45 X 10 ⁸	0.039	29.7	25,000	12,500	5,000	44.1
SI Units	[N-m]		[rpm]	[N-m/rad]	[degree]	[kg-m ²]	[N]	[N-m]	[N]	[kg]
84002V(5-2)	56.5	113	0 to ±15,000 Suffix H or, 0 to ±8,500 Suffix B	5.95 X 10 ⁴	0.054	0.00448	2,220	28.2	556	2.3
84002V(1-3)	113	226		1.67 X 10 ⁵	0.039	0.00448	4,450	56.5	1,110	2.3
84002V(2-3)	226	452		4.54 X 10 ⁵	0.028	0.00451	8,900	113	2,220	2.3
84004V(5-3)	565	1,130	0 to ±13,500 Suffix H or, 0 to ±8,000 Suffix B	5.15 X 10 ⁵	0.063	0.028	13,300	169	3,560	6.0
84004V(1-4)	1,130	2,260		1.42 X 10 ⁶	0.045	0.028	17,800	226	4,450	6.1
84004V(2-4)	2,260	4,520		3.83 X 10 ⁶	0.034	0.028	26,700	339	8,900	6.1
84007V(5-4)	5,650	11,300	0 to ±10,000 Suffix H or, 0 to ±6,000 Suffix B	6.31 X 10 ⁶	0.051	0.207	66,700	847	17,800	19.6
84007V(1-5)	11,300	22,600		1.63 X 10 ⁷	0.039	0.210	111,000	1,410	22,200	20.0

Note: 1. Maximum extraneous loads and rated torque may be applied simultaneously without damage


MCRT® 8500V Bearingless Torquemeters With 400% Overload

MCRT® Model	Torque Rating		Speed Rating	Torsional Stiffness	Maximum Angular Deflection	Rotating Inertia	Maximum Extraneous Loads ¹			Max Rotor Wt.
	Range	Overload					Thrust	Bending	Shear	
English Units	[lbf-in]		[rpm]	[lbf-in/rad]	[degree]	[ozf-in s ²]	[lbf]	[lbf-in]	[lbf]	[lbs]
85002V(25-1)	250	1,000	0 to ±15,000 Suffix H or, 0 to ±8,500 Suffix B	5.27 X 10 ⁵	0.027	0.634	500	250	125	5.0
85002V(5-2)	500	2,000		1.48 X 10 ⁶	0.019	0.635	1,000	500	250	5.0
85002V(1-3)	1,000	4,000		4.02 X 10 ⁶	0.014	0.638	2,000	1,000	500	5.0
85004V(25-2)	2,500	10,000	0 to ±13,500 Suffix H or, 0 to ±8,000 Suffix B	4.56 X 10 ⁶	0.031	3.96	3,000	1,500	800	13.3
85004V(5-3)	5,000	20,000		1.26 X 10 ⁷	0.023	3.97	4,000	2,000	1,000	13.4
85004V(1-4)	10,000	40,000		3.39 X 10 ⁷	0.017	3.99	6,000	3,000	2,000	13.5
85007V(25-3)	25,000	100,000	0 to ±10,000 Suffix H or, 0 to ±6,000 Suffix B	5.59 X 10 ⁷	0.026	29.3	15,000	7,500	4,000	43.3
85007V(5-4)	50,000	200,000		1.45 X 10 ⁸	0.020	29.7	25,000	12,500	5,000	44.1
SI Units	[N-m]		[rpm]	[N-m/rad]	[degree]	[kg-m ²]	[N]	[N-m]	[N]	[kg]
85002V(25-1)	28.2	113	0 to ±15,000 Suffix H or, 0 to ±8,500 Suffix B	5.95 X 10 ⁴	0.027	0.00448	2,220	28.2	556	2.3
85002V(5-2)	56.5	226		1.67 X 10 ⁵	0.019	0.00448	4,450	56.5	1,110	2.3
85002V(1-3)	113	452		4.54 X 10 ⁵	0.014	0.00451	8,900	113	2,220	2.3
85004V(25-2)	282	1,130	0 to ±13,500 Suffix H or, 0 to ±8,000 Suffix B	5.15 X 10 ⁵	0.031	0.028	13,300	169	3,560	6.0
85004V(5-3)	565	2,260		1.42 X 10 ⁶	0.023	0.028	17,800	226	4,450	6.1
85004V(1-4)	1,130	4,520		3.83 X 10 ⁶	0.017	0.028	26,700	339	8,900	6.1
85007V(25-3)	2,820	11,300	0 to ±10,000 Suffix H or, 0 to ±6,000 Suffix B	6.31 X 10 ⁶	0.026	0.207	66,700	847	17,800	19.6
85007V(5-4)	5,650	22,600		1.63 X 10 ⁷	0.020	0.210	111,000	1,410	22,200	20.0

Note: 1. Maximum extraneous loads and rated torque may be applied simultaneously without damage

ORDER NUMBER FORMAT **MCRT® A B C D E**


- A = Model Number from tables; either 84007V, 85007V, etc.
- B = Range from tables above; (2-4) or (5-4), etc.
- C = Performance Code; N for Standard Performance or C for Enhanced Performance
- D = Optional Zero Velocity Speed Pickup; N for None, Z for Magnetic Type, O for Optical Type
- E = Speed Rating Suffix; H designates high speed rating, B designates lower speed rating

ORDER NUMBER EXAMPLE  **MCRT® 84007V(1-5)COH** specifies a Bearingless Torquemeter with a 100,000 lbf-in Torque Rating, a 200,000 lbf-in Torque Overload rating, Enhanced Performance, an Optical Speed Pickup and a 10,000 rpm Maximum Speed Rating.

Dimensions in English Units

Please note, dimensions subject to change without notice. Contact factory for certified drawings.


MCR	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"	"J"	"K"	"L"	"M"	"N"	"O"	"P"
8.002V	8.484	5.500	0.813	1/4-20 X 1/2 DP	Ø0.286 THRU, Ø0.438 X 1.738 DP C/BORE	Ø3.625	Ø6.375	8.938	Ø4.375	0.125	2.500	1.375	0.188	Ø 3.1246	Ø 3.1257	Ø 3.1250
8.004V	7.891	5.500	0.813	7/16-14 X 7/8 DP	Ø0.453 THRU, Ø0.719 X 2.375 DP C/BORE	Ø5.625	Ø8.875	10.188	Ø6.875	0.250	3.500	2.313	0.313	Ø 4.8744	Ø 4.8760	Ø 4.8750
8.007V	7.251	5.625	0.750	3/4-10 X 1-1/32 DP	Ø0.766 THRU, Ø1.188 X 3.289 DP C/BORE	Ø9.000	Ø12.875	12.188	Ø10.875	0.250	4.578	3.226	0.313	Ø 7.4994	Ø 7.5012	Ø 7.5000

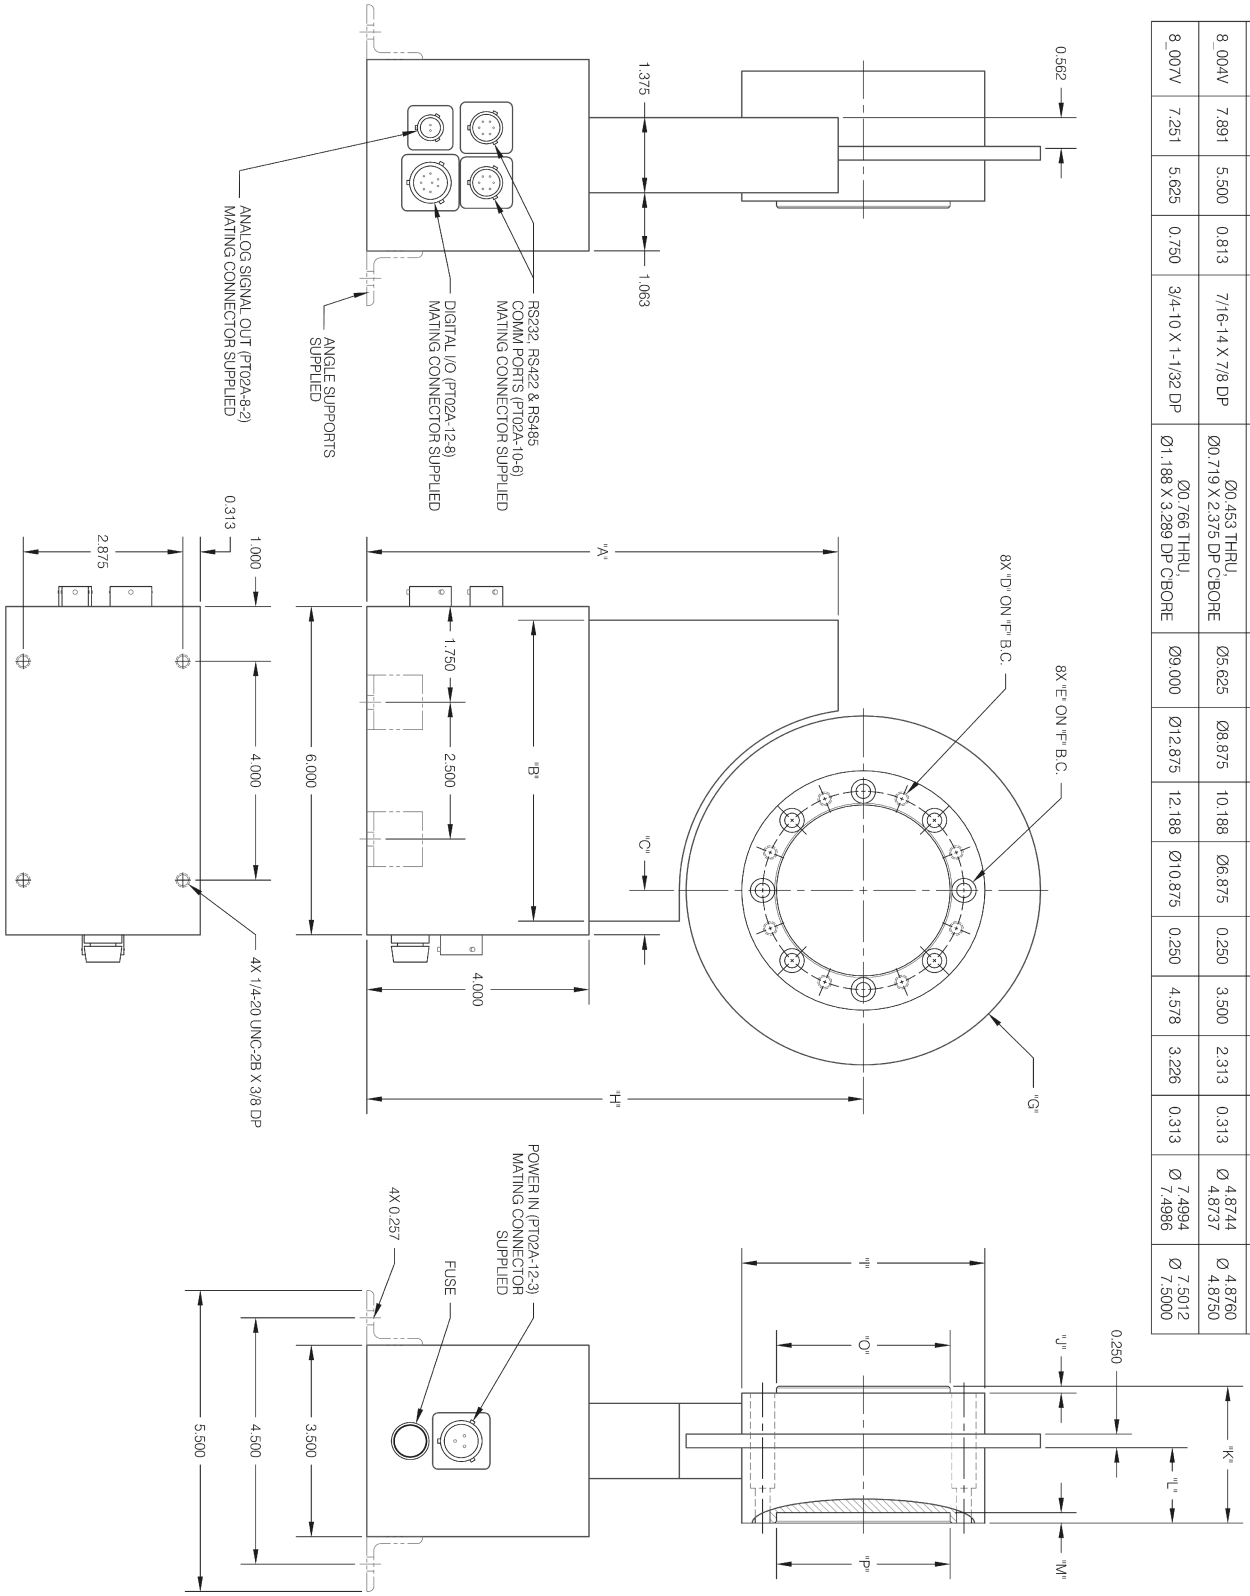

Dimensions in SI Units

Please note, dimensions subject to change without notice. Contact factory for certified drawings.

MCRT	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"	"J"	"K"	"L"	"M"	"O"	"P"
8_002V	215.49	139.70	20.65	1/4-20 X 12.70 mm DP	Ø6.76 THRU. Ø11.13 X 44.15 DP CBORE	Ø82.08	Ø161.92	227.03	Ø111.12	3.18	63.50	34.92	4.78	Ø79.365 Ø79.375	Ø79.383 Ø79.375
8_004V	200.43	139.70	20.65	7/16-14 X 22.22 mm DP	Ø11.51 THRU. Ø18.26 X 60.32 DP CBORE	Ø142.88	Ø225.42	258.78	Ø174.62	6.35	88.90	58.72	7.95	Ø123.810 Ø123.792	Ø123.850 Ø123.825
8_007V	184.94	142.88	19.05	3/4-10 X 26.42 mm DP	Ø19.46 THRU. Ø30.18 X 83.54 DP CBORE	Ø228.60	Ø327.02	327.02	Ø276.22	6.35	116.28	81.94	7.95	Ø190.485 Ø190.500	Ø190.530 Ø190.500

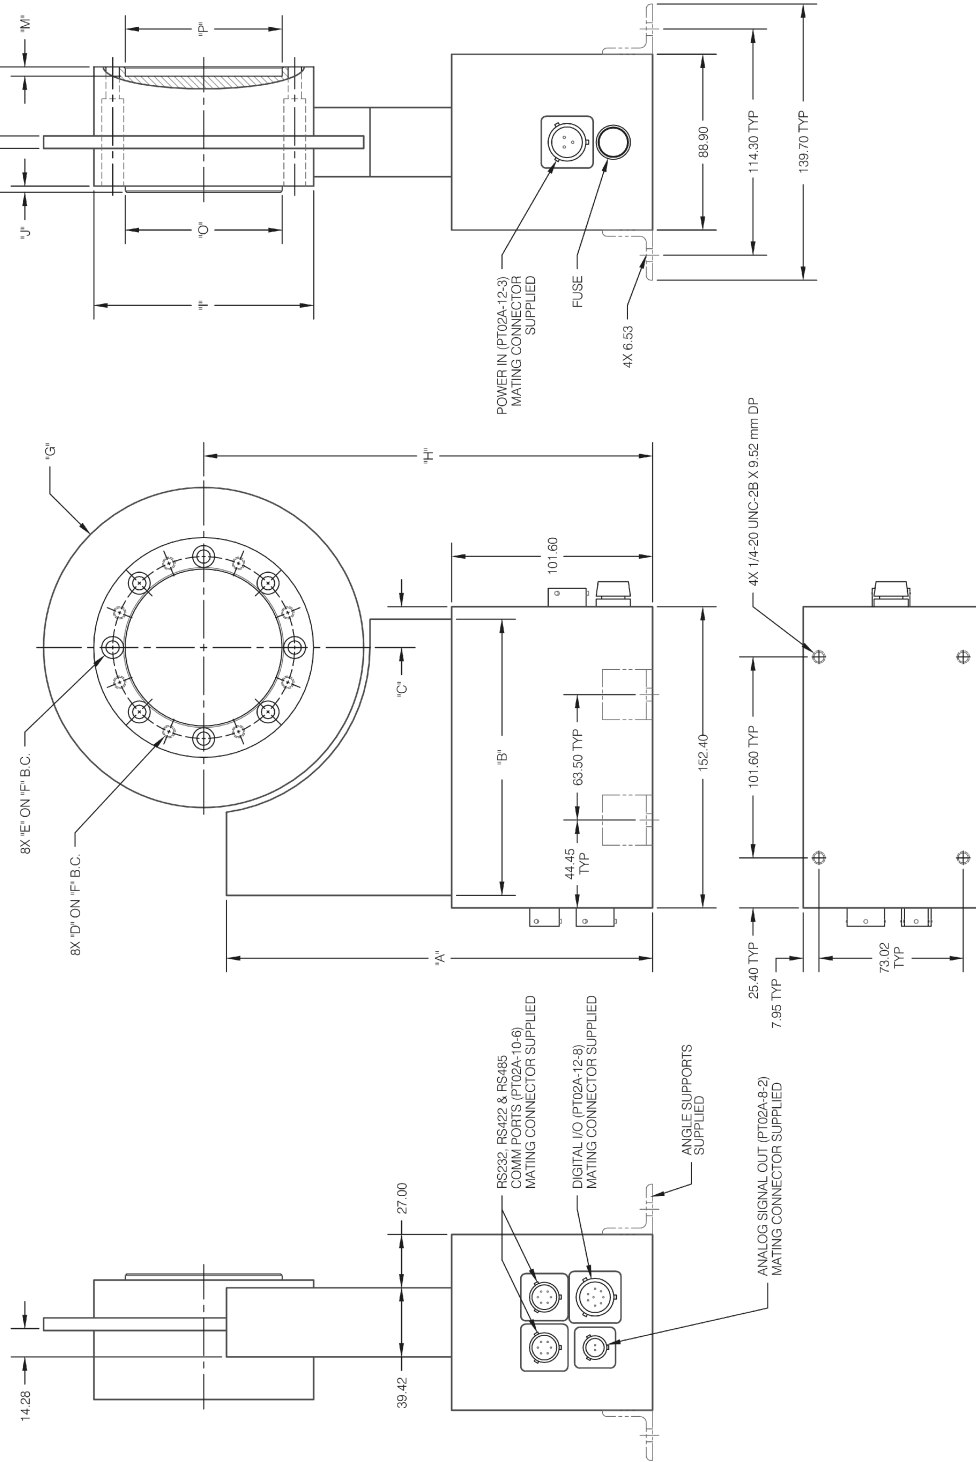

S. HIMMELSTEIN AND COMPANY

2490 Pembroke Avenue, Hoffman Estates, Illinois 60169 • Tel: 847/843-3300 • Fax: 847/843-8488